

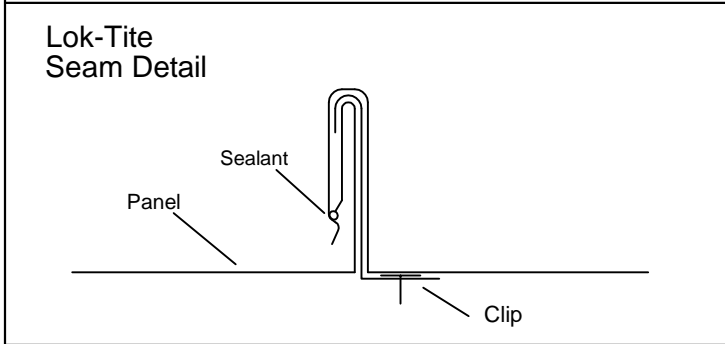
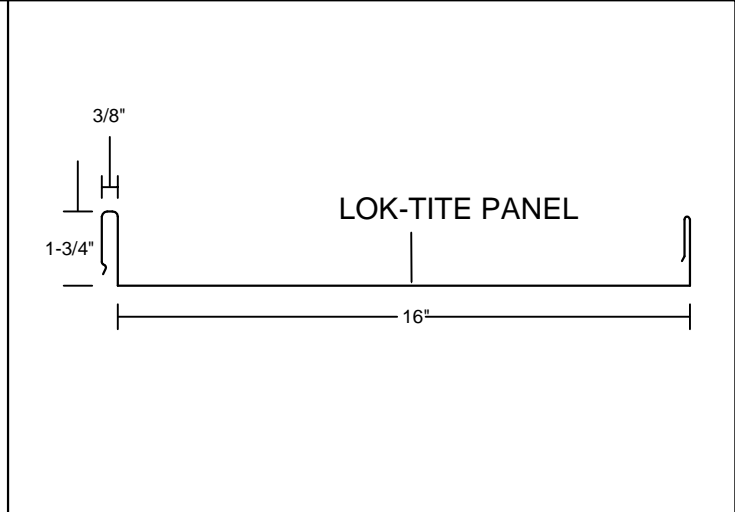
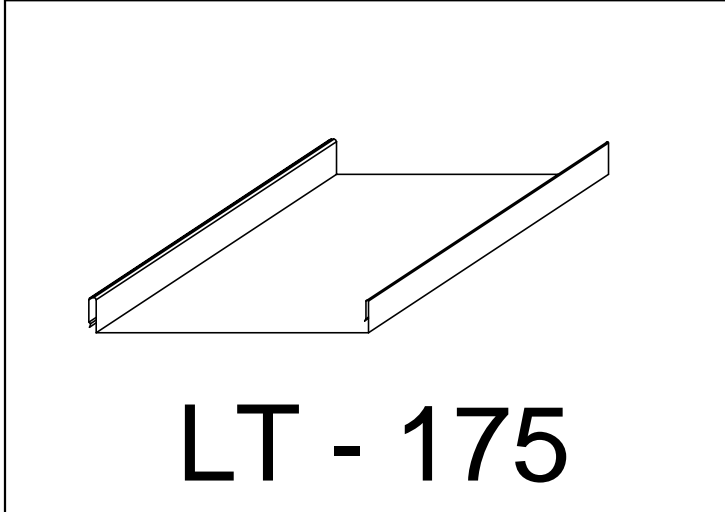


NORTHWEST ROOF TILE & METAL
 6846 THEALL RD., # 400
 HOUSTON, TX 77066
 (281)893-8382
 FAX (281)893-7647

LT - 175

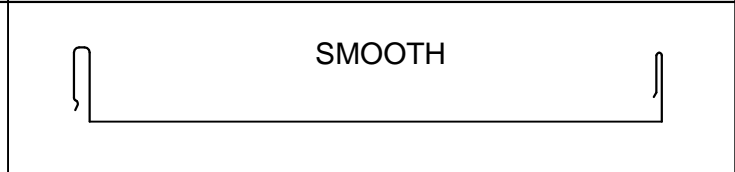

LT- 175 Structural Standing Seam Roof System combines the style and beauty of an architectural product with the load handling characteristics of a structural roof system. LT- 175 is also an excellent choice for mansards or fascia. Panels are joined by an intergal locking seam and held into place by concealed metal clips. A bead of sealant is factory applied in LT- 175's seam upon request. The LT - 175 System may be installed over solid decking or sub-framing. Standard panel width is 16". Other widths are available upon request. LT-175's testing program includes: UL 90 wind uplift; ASTM E1680 air infiltration; and UL 2218 Class 4 impact resistance. Minimum slope of 3:12 is recommended.

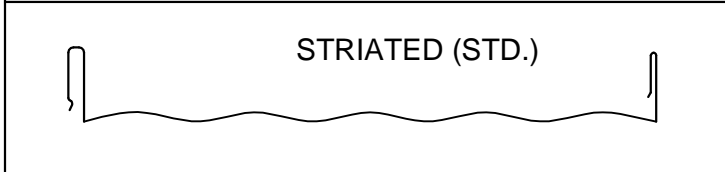

COLORS (KYNAR 500)

24 GAGE											
Buckskin	Aged Bronze	Medium Bronze	Dark Bronze	Copper Brown	Parchment	Shasta White	Charcoal Grey	Zinc Grey	Matte Black	Forest Green	
Natural White	Award Blue	METALLIC COLORS				Champagne	Copper - Cote	Antique Copper	NATURAL METAL FINISH		
<div style="display: flex; justify-content: space-between;"> Satin Finish Gal Zinc - Cote Lead - Cote Prewathered </div>											

Notes:

- Minimum order quantities and additional charges may apply for coating and slitting.
- Other widths, gauges, and colors are available upon request.
- Contact you local distributor for specific pricing and lead times.
- Oil canning is inherent in all metal panels and is not cause for panel rejection. To minimize the apperance of oil canning, a striated surface is recommended.