


ML150 Panel



281-893-8382

1.5 Inch Mechanical Lock Panel

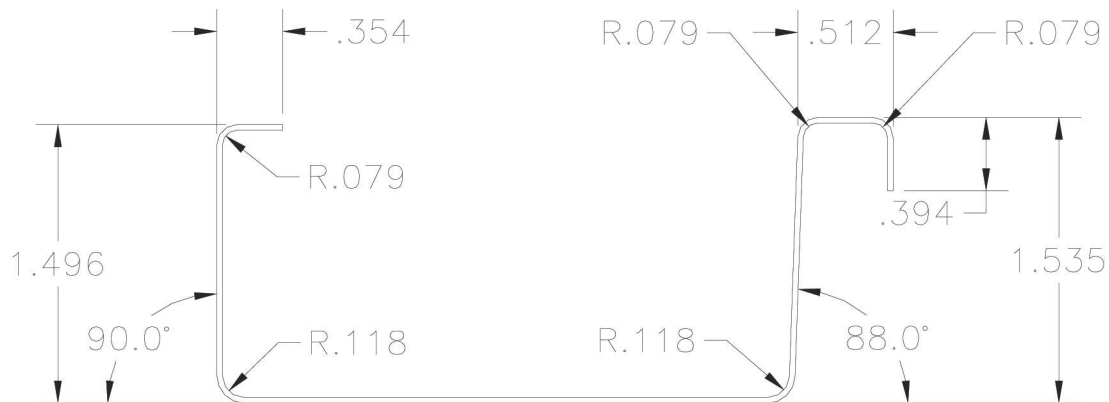

1.5 Inch Mechanical Lock Panel

Architectural or structural standing seam panel

1.5 inch rib height.

Gauges 22, 24, 26

Specially designed clip for thermal movement.

Applies over solid substrate

Type	Test Type	Width	Ga.	Fastener Spacing	Decking
Air Infiltration	ASTM 283	16	24 CRS	36	5/8 Plywood
Water Infiltration	ASTM 331	16	24 CRS	36	5/8 Plywood
Wind Uplift Class 90	UL Construction Number 603	20	.032 Al	36	5/8 Plywood
Wind Uplift Class 90	UL Construction Number 603	16	.032 Zinc	36	5/8 Plywood
Wind Uplift Class 90	UL Construction Number 605	16	16 oz CU	36	5/8 Plywood
Wind Uplift	Dade 80 MPH	16	24 CRS	36	1/2 Plywood
Wind Uplift	Dade 140 MPH	16	24 CRS	36	5/8 Plywood
Impact	Dade Impact	16	24 CRS	36	5/8 Plywood
Water	Dade Wind Driven Rain	16	24 CRS	36	5/8 Plywood
Wind Uplift Class 90	UL Construction Number 588	16	24 CRS	36	5/8 Plywood
Wind Uplift Class 90	UL Construction Number 558	16	24 CRS	36	5/8 Plywood
Hail	UL Class 4	16	24 CRS	36	5/8 Plywood
Wind Uplift	ASTM 1592	18.25	24 CRS	36	Purlins 16ga
Flexural Strength	ASTM 330	18.25	24 CRS	36	Purlins 16ga
Wind Uplift	ASTM 1592	18.25	24 CRS	36	Purlins 16ga
Flexural Strength	ASTM 330	18.25	24 CRS	36	Purlins 16ga
Hail	UL Class 4	16	24 CRS	36	5/8 Plywood